



Light distribution options

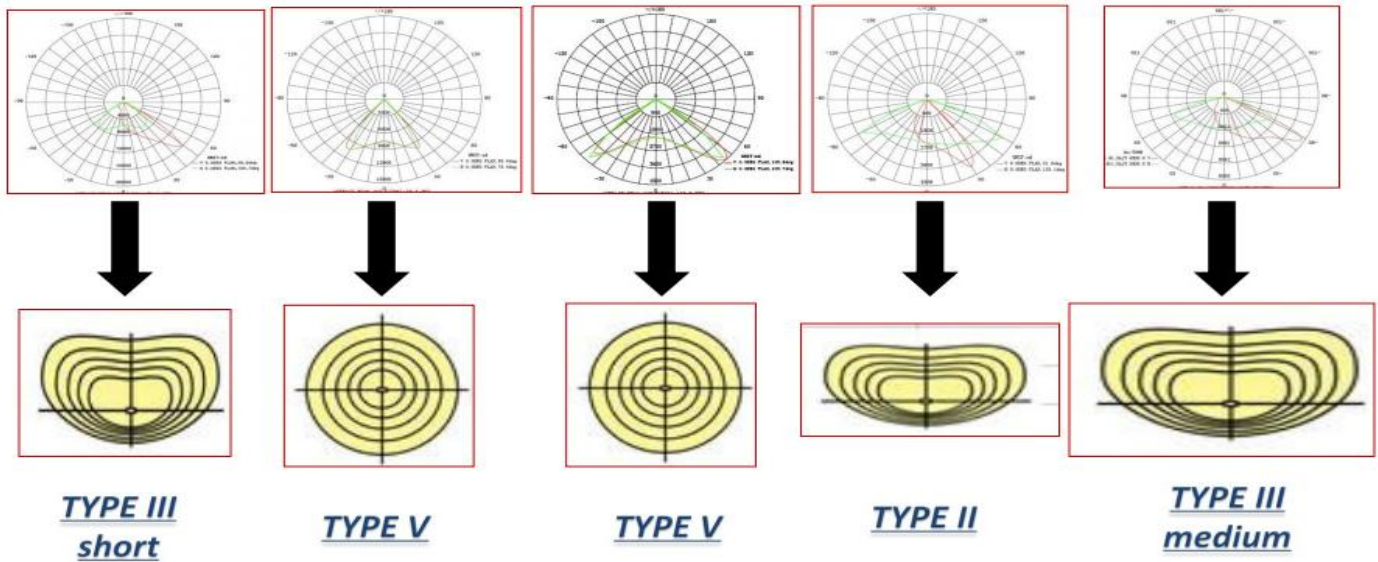

Pole light mounting bracket options

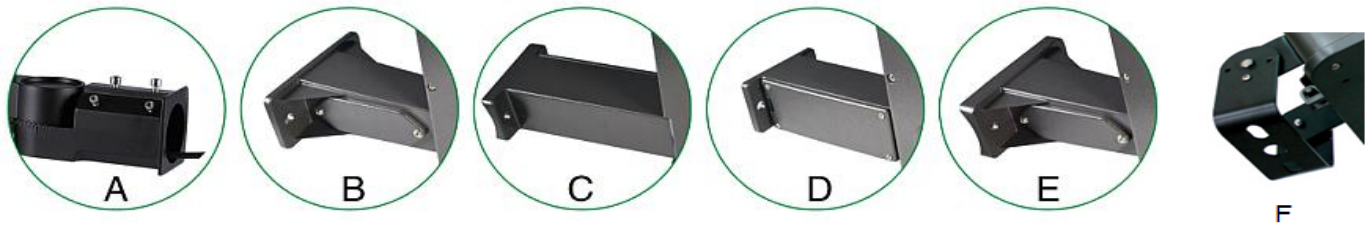

MOUNTING

G 1/2" Knuckle Mount

Die cast aluminum knuckle provides flexibility in mounting from a variety of areas.



Slipfitter Mount

Die-cast aluminum slipfitter mounts on 2 3/8" to 3" O.D. tenon easily.



Trunnion Mount

Die-cast aluminum trunnion is easily adapted to many surfaces and allows easy fixture aiming angles.



MOUNTING

Trunnion Mount

Die-cast aluminum trunnion is easily adapted to many surfaces and allows easy fixture aiming angles.



Wall Mount (for 30W & 45W ONLY)

Wall Mount is easy to install onto standard 4 & 5" J-box mounting.



CCT options



Tenon options

POLE BRACKET • For mounting one fixture on an existing pole	
	<p>4" Square Pole Mount with 2-3/8" O.D. Tenon No. TVA4D Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p>5" Square Pole Mount with 2-3/8" O.D. Tenon No. TVA5D Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p>Bracket with 2-3/8" O.D. Tenon NO. TVA4TRD Finish: Dark Bronze USE: The 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures is designed to mount Techlight light fixtures that are equipped with a yoke mount onto a 2-3/8" OD tenon. 2" slipfitter adaptor for MESTER flood lights with trunnion. Goes on 2" pipe and accepts a trunnion fixture.</p>
WALL BRACKET • Attaches to any flat surface • Provides wiring access	
	<p>90° Wall Mount Bracket with 2-3/8" O.D. Tenon NO. WMVD Finish: Dark Bronze USE: The 90° wall mount bracket with 2-3/8" tenon attaches an MESTER floodlight to almost any surface: wall, roof, or wood pole. Provides wiring access and built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>

INSTALLATION KIT	
	<p>Slipfitter NO. Slipfitter Installation kit Finish: Dark Bronze USE: For pole mounting. Aluminum mast arm adaptor secures fixture head to nominal 2" (2-3/8" O.D. pipe size) horizontal steel tenon arm. Furnished with two 1/2" hex head stainless-steel screw.</p>
	<p>Square Ploes NO. Square Ploes Installation kit Finish: Dark Bronze USE: Standard versatile mounting arm for MESTER shoe box application, with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts and two 1/2" hex head stainless-steel screw.</p>
	<p>Round Ploes NO. Round Ploes Installation kit Finish: Dark Bronze USE: Standard versatile mounting arm for MESTER shoe box application, with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts and two 1/2" hex head stainless-steel screw. Suitable for 4" & 5" round Ploes.</p>
	<p>150W Trunnion NO. Trunnion Installation kit Finish: Dark Bronze USE: The trunnion mount attaches an MESTER floodlight (70W/105W/150W) to almost any surface: wall, roof, or wood pole. It can be used with our 2-3/8" O.D. Tenon mounting bracket (TVA4TRD) to install.</p>
	<p>250W Trunnion NO. 250W Trunnion Installation kit Finish: Dark Bronze USE: The trunnion mount attaches an MESTER floodlight (250W/300W) to almost any surface: wall, roof, or wood pole. It can be used with our 2-3/8" O.D. Tenon mounting bracket (TVA4TRD) to install.</p>
	<p>Wall Mount NO. Wall Mount Installation kit Finish: Dark Bronze USE: Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting, and with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts.</p>